

BOSE EDGEMAX™

PREMIUM IN-CEILING LOUDSPEAKERS




Exceptional audio quality, hidden in plain sight.

Provide improved audio quality and coverage without sacrificing room aesthetics with Bose EdgeMax. Designed with PhaseGuide® technology, EdgeMax loudspeakers mount quickly and easily near wall-ceiling boundaries even in the most architecturally challenging rooms.

PhaseGuide® Technology


EdgeMax loudspeakers utilize a two-way system comprised of a compression driver mounted to a proprietary Bose PhaseGuide structure, and an 8-inch driver mounted in a tuned, ported enclosure. Uniquely, EdgeMax loudspeakers have a 75-degree asymmetrical vertical coverage angle and are engineered to be installed in corners and along room perimeters.

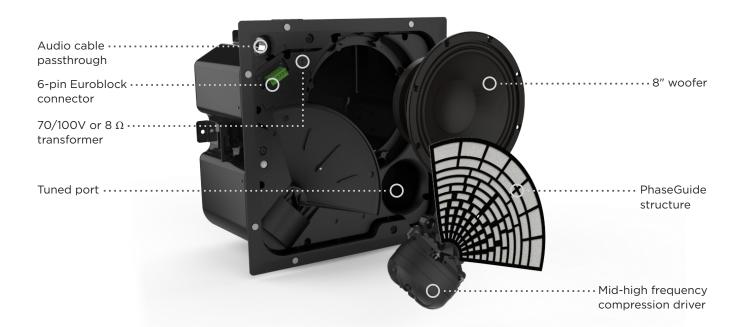



Time saving, easy install

Autohold spring-loaded mounting arms, magnetic grille attachment, and front baffle connection reduces installation time.



Undisturbed architectural design

Mount as an in-ceiling speaker at the edge of the room to preserve aesthetics while providing sound quality typical of surface-mounted designs.



Powerful two-way sound

Features a high-frequency compression driver with an 8-inch passive woofer for 7120 dB SPL peak performance. Wall-boundary loading provides extended bass impact.

Specifications

Nominal coverage patterns

EM90 90 $^{\circ}$ H x asymmetrical 75 $^{\circ}$ V (0 $^{\circ}$ to 75 $^{\circ}$ referenced to wall)

EM180 180°H x asymmetrical 75°V (0° to 75° referenced to wall)

Frequency range

45 - 20,000 Hz

Power handling AES (long term, peak) $150~\mathrm{W},\,600~\mathrm{W}$

Safety compliance

UL1480A, UL2043

Includes

Tile bridge, white grille

Accessories

Black grille, rough-in pan

Indoor use only

LEARN MORE AT BOSEEDGEMAX.COM